



(12) **United States Patent**
Hirvonen

(10) **Patent No.:** **US 8,856,930 B2**
(45) **Date of Patent:** **Oct. 7, 2014**

(54) **DOWNLOAD CONTROL**
(75) Inventor: **Timo Hirvonen**, Espoo (FI)
(73) Assignee: **F-Secure Corporation**, Helsinki (FI)
(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 96 days.
(21) Appl. No.: **13/435,101**
(22) Filed: **Mar. 30, 2012**

2006/0253578	A1	11/2006	Dixon et al.	709/225
2009/0300761	A1*	12/2009	Park et al.	726/23
2009/0328209	A1*	12/2009	Nachenberg	726/22
2010/0008509	A1*	1/2010	Matsushita et al.	380/279
2011/0161668	A1*	6/2011	Sentinelli et al.	713/168
2011/0162070	A1	6/2011	Krasser et al.	726/23
2011/0191420	A1*	8/2011	Painter et al.	709/204
2011/0191850	A1*	8/2011	Turbin	726/24
2011/0225655	A1	9/2011	Niemelae et al.	726/24
2012/0017275	A1*	1/2012	Harmonen	726/24
2012/0066346	A1*	3/2012	Virmani et al.	709/219
2012/0192275	A1*	7/2012	Oliver et al.	726/24
2012/0222138	A1*	8/2012	Aaron	726/30

* cited by examiner

(65) **Prior Publication Data**
US 2013/0262851 A1 Oct. 3, 2013

Primary Examiner — Morshed Mehedi
(74) *Attorney, Agent, or Firm* — Harrington & Smith


(51) **Int. Cl.**
G06F 21/00 (2013.01)
(52) **U.S. Cl.**
USPC **726/24**; 726/12; 726/30; 713/168;
709/204
(58) **Field of Classification Search**
USPC 726/22, 24
See application file for complete search history.

(57) **ABSTRACT**

Download control is disclosed. An apparatus includes one or more processors, and one or more memories including computer program code. The one or more memories and the computer program code configured to, with the one or more processors, cause the apparatus at least to perform: obtain one or more cryptographic hash values of a target file to be downloaded; cause transmission of the one or more cryptographic hash values to a trusted source; obtain reputation data relating to the target file originated from the trusted source in response to the transmission of the one or more cryptographic hash values; and control download of the target file on the basis of the reputation data.

(56) **References Cited**
U.S. PATENT DOCUMENTS
7,219,140 B2* 5/2007 Marl et al. 709/219
8,209,758 B1* 6/2012 Doukhvalov et al. 726/24
8,448,232 B1* 5/2013 Zhu et al. 726/12
8,528,087 B2* 9/2013 Hsu et al. 726/23

20 Claims, 8 Drawing Sheets

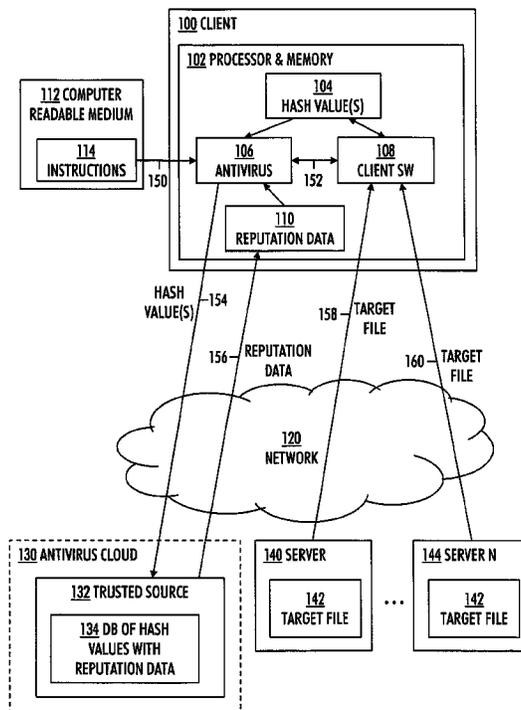

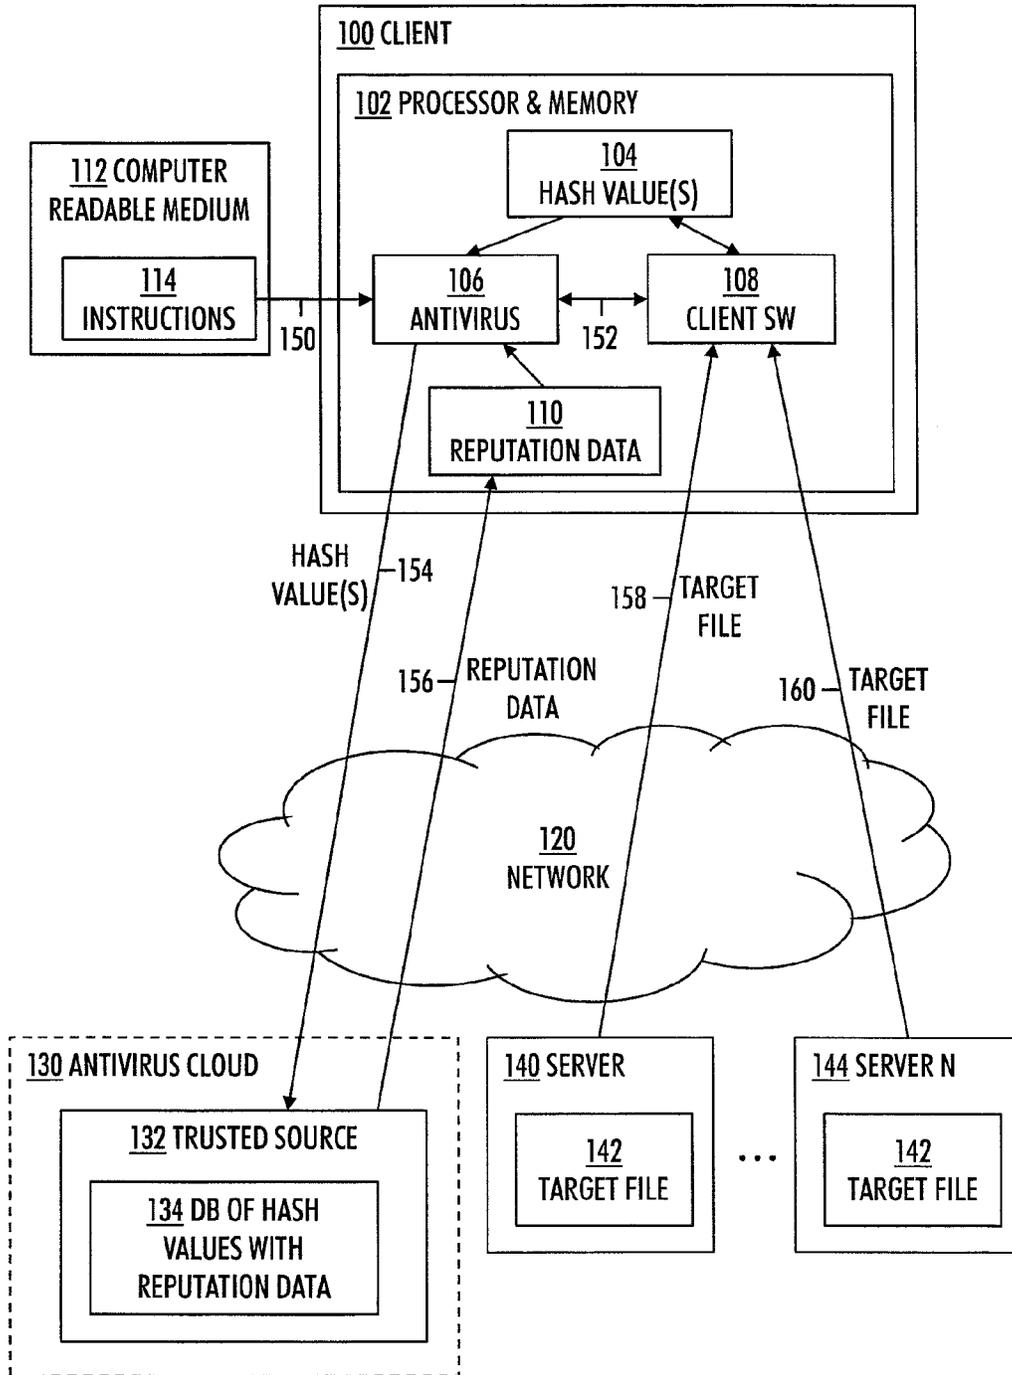


FIG. 1

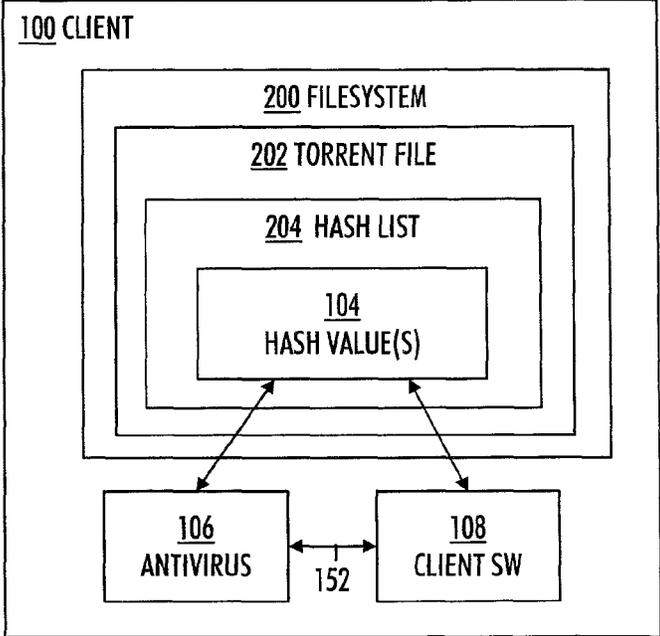


FIG. 2

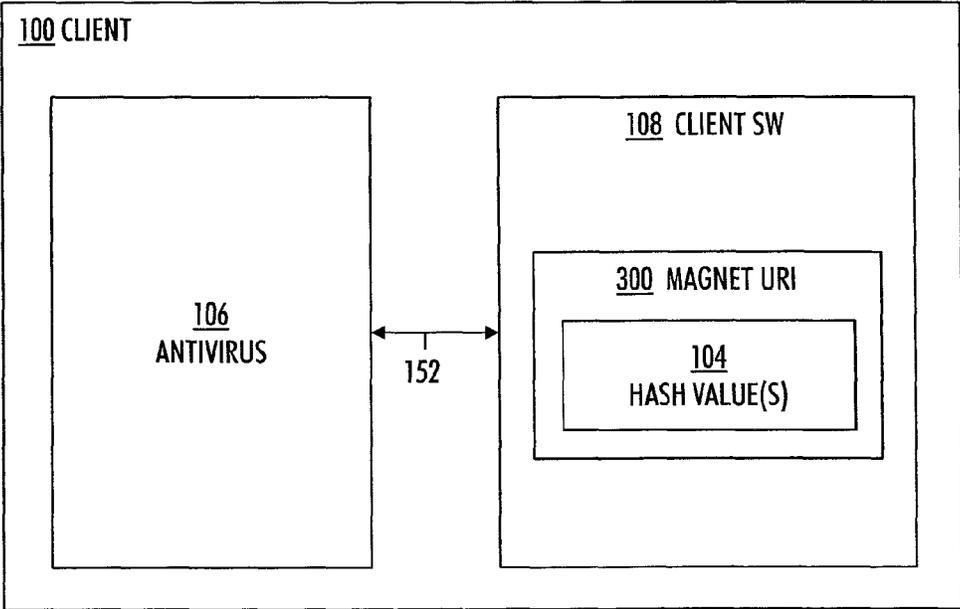


FIG. 3

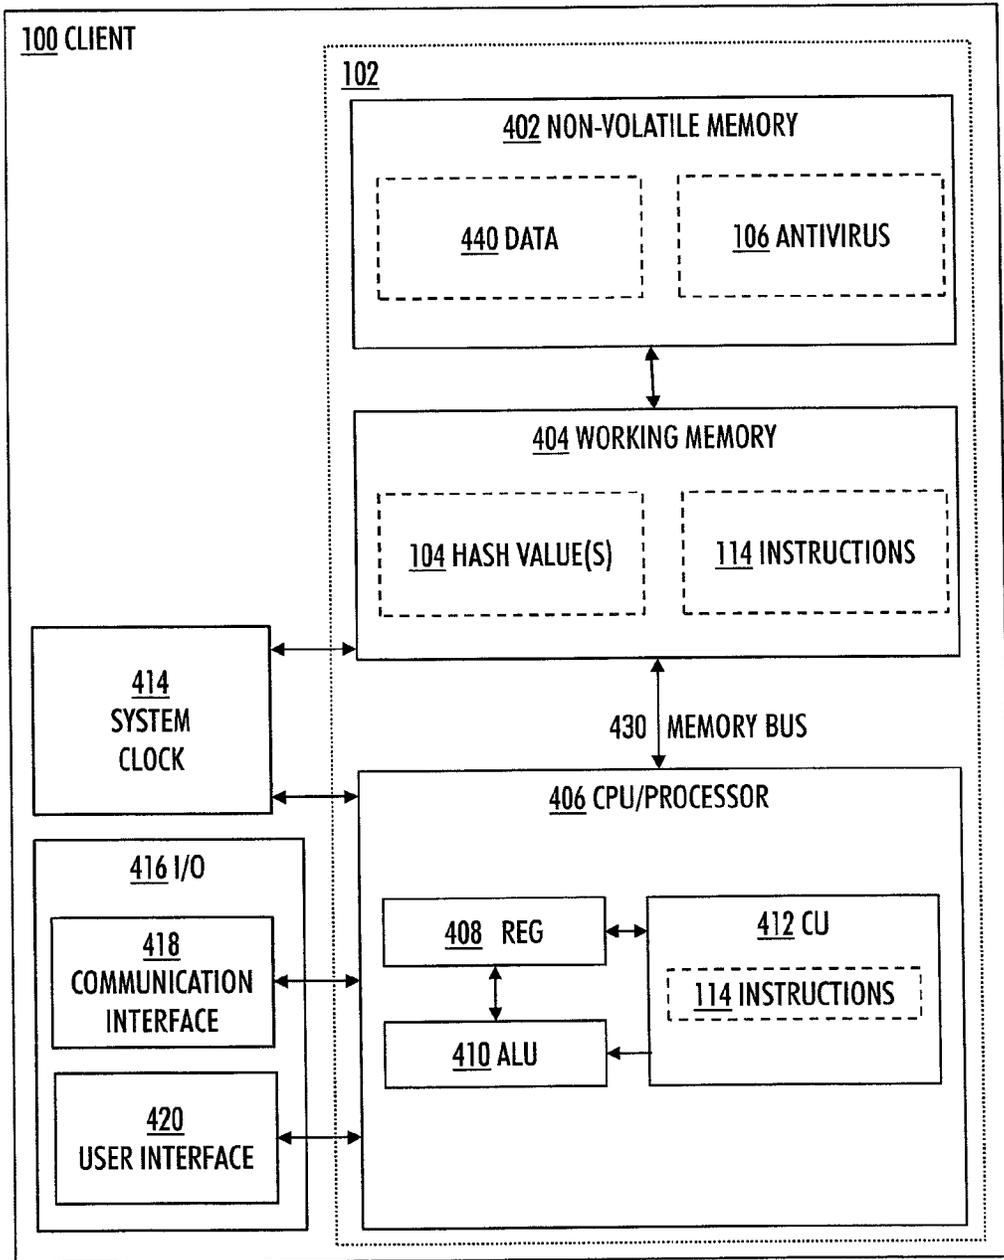


FIG. 4

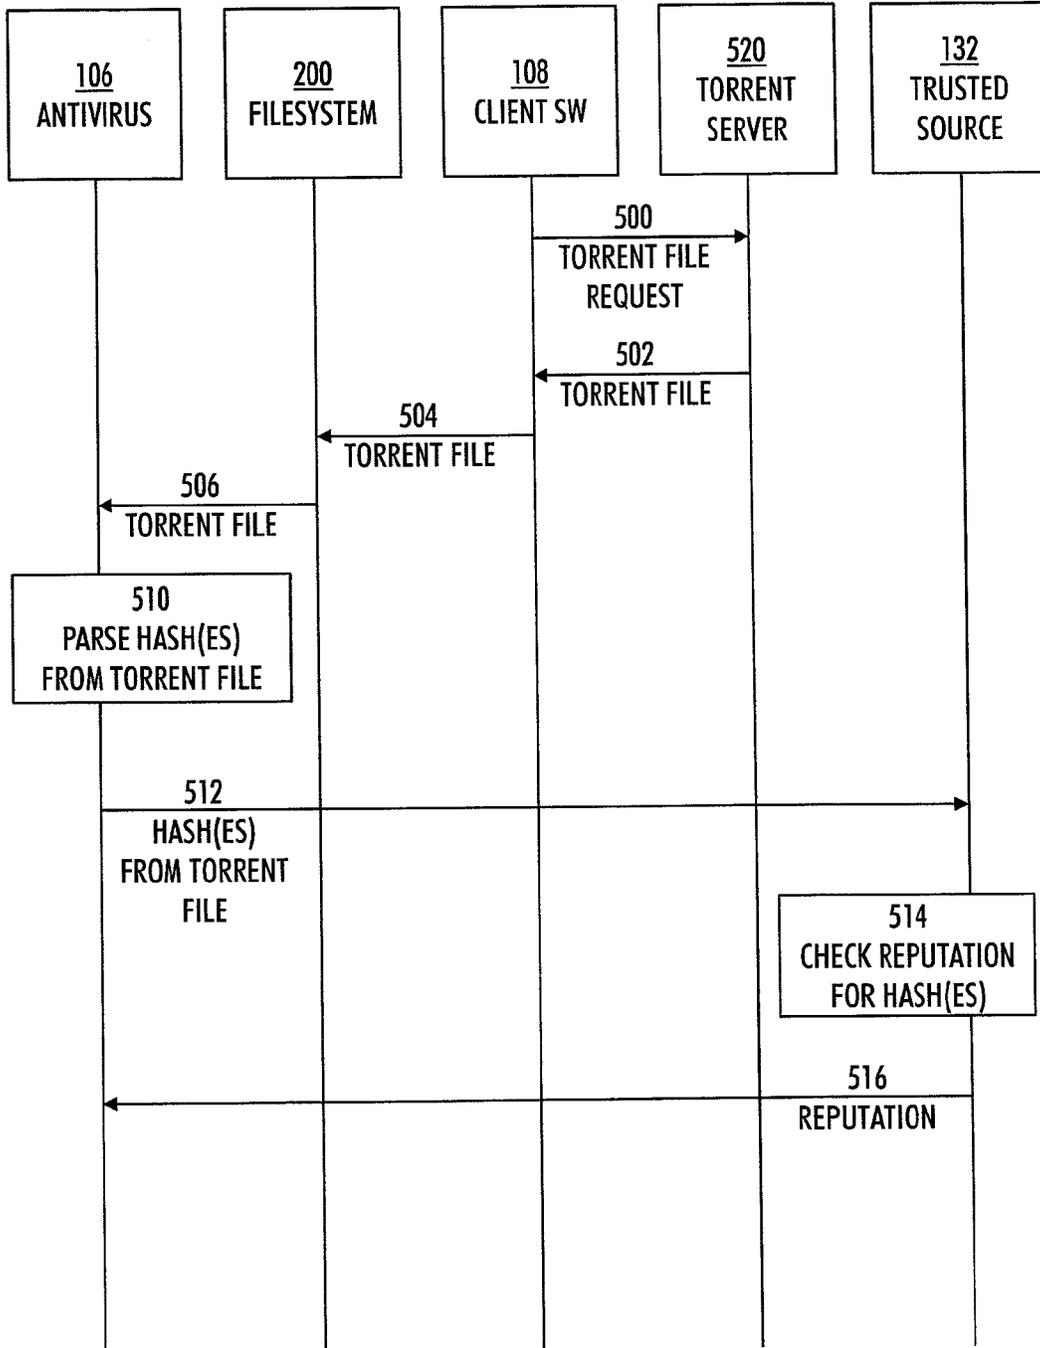


FIG. 5

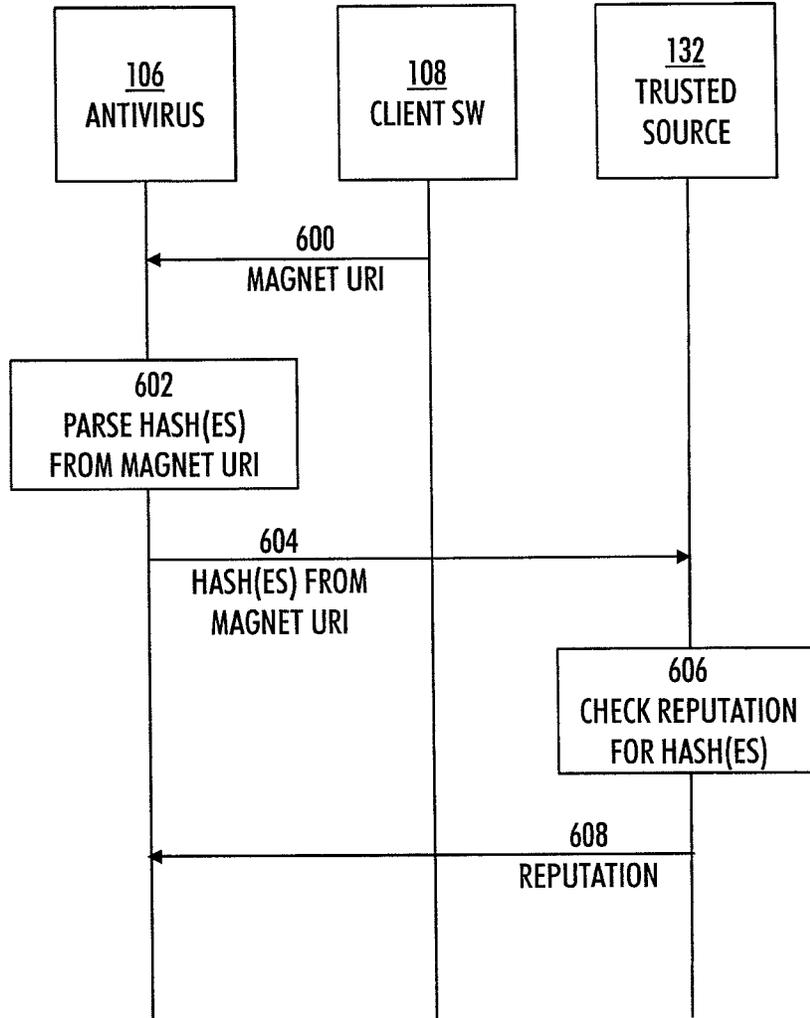


FIG. 6

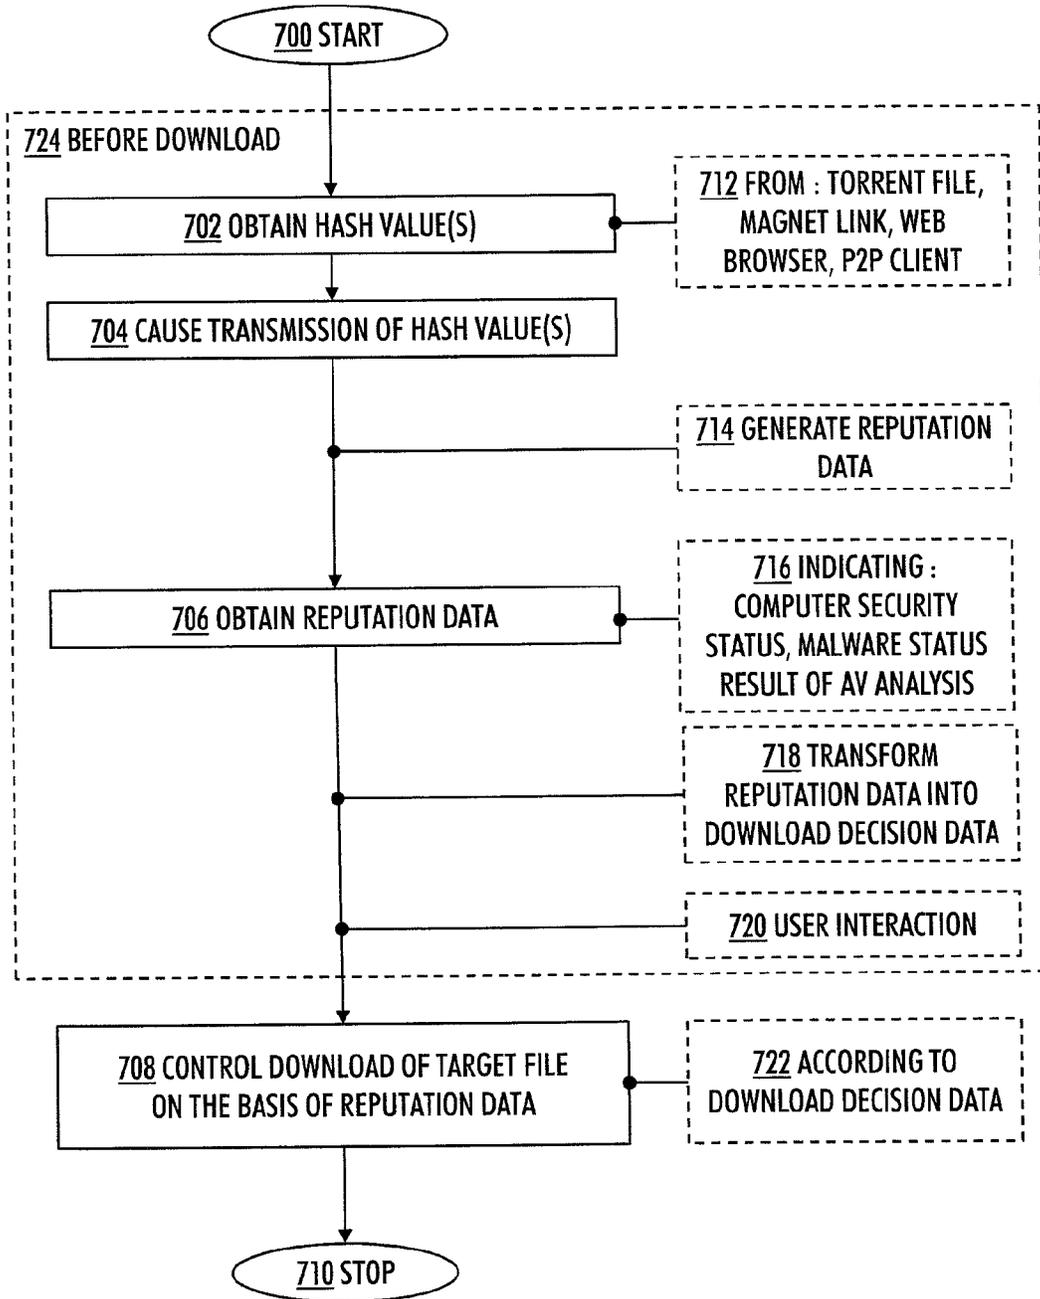


FIG. 7

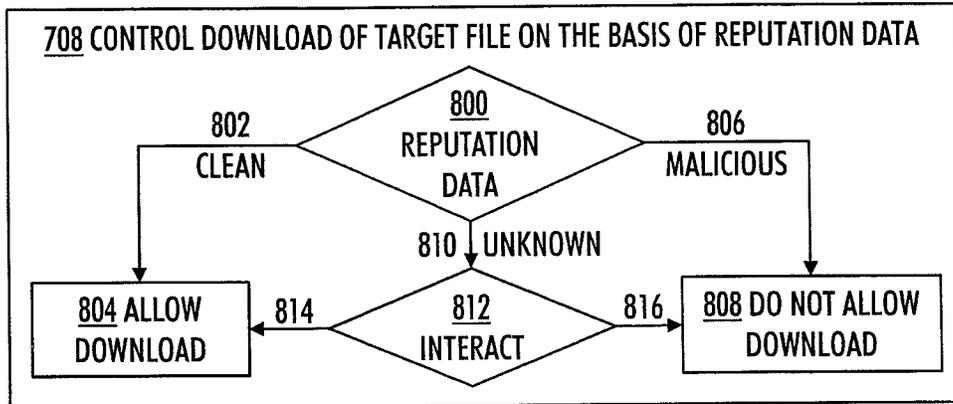


FIG. 8

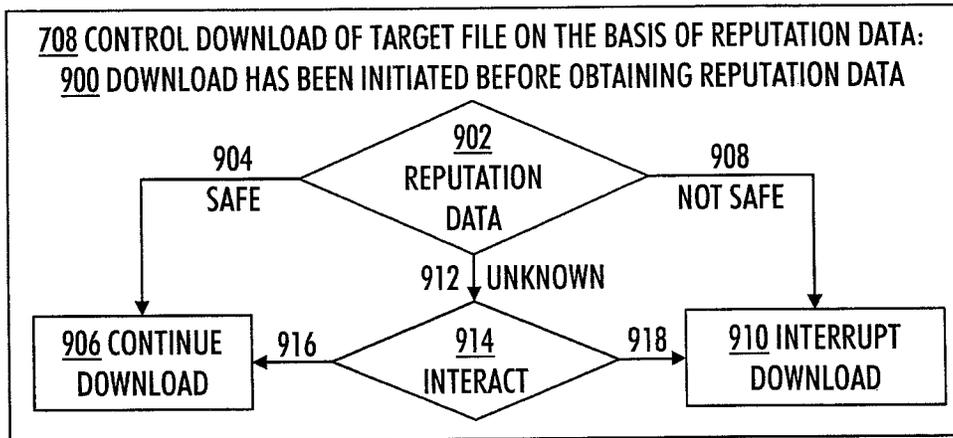


FIG. 9

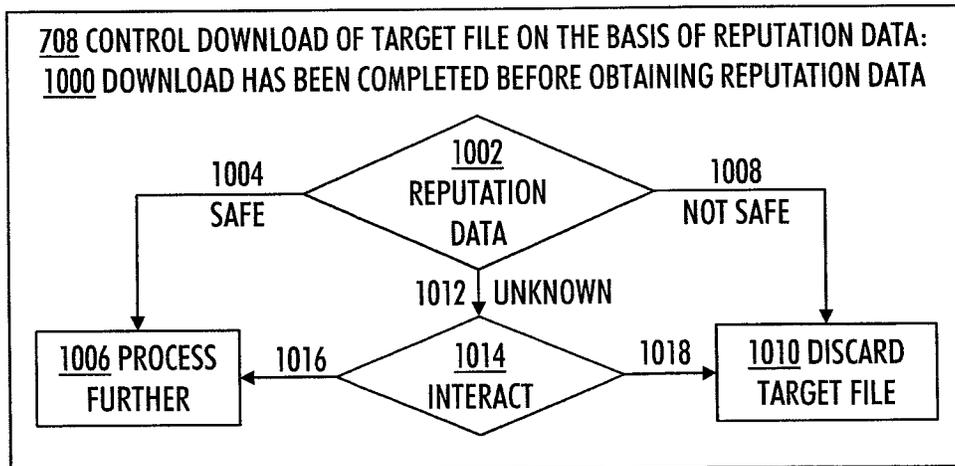


FIG. 10

```
1100 TORRENT FILE

{
  'announce': 'http://bttracker.debian.org:6969/announce',
  'info':
  {
    'name': 'debian-503-amd64-CD-1.iso',
    'piece length': 262144,
    'length': 678301696,
    'pieces':
    '841ae846bc5b6d7bd6e9aa3dd9e551559c82abc1...d14f1631d776008f83772ee170c42411618190
a4'
  }
}
```

FIG. 11

```
1200 MAGNET LINK

magnet:?xt=urn:sha1:YNCKHTQCWBTRNJIV4WNAE52SJUQCZO5C
```

FIG. 12

1

DOWNLOAD CONTROL

FIELD

The invention relates to download control.

BACKGROUND

Download of data over the networks has increased dramatically. Downloaded data may be infested by malicious software (malware) including computer viruses, worms, Trojan horses, spyware, adware, rootkits, and other malicious programs. Download control is crucial in avoiding damage caused by the malware.

BRIEF DESCRIPTION

The present invention seeks to provide improved download control.

According to an aspect of the present invention, there is provided an apparatus comprising one or more processors, and one or more memories including computer program code, the one or more memories and the computer program code configured to, with the one or more processors, cause the apparatus at least to perform: obtain one or more cryptographic hash values of a target file to be downloaded; cause transmission of the one or more cryptographic hash values to a trusted source; obtain reputation data relating to the target file originated from the trusted source in response to the transmission of the one or more cryptographic hash values; and control download of the target file on the basis of the reputation data.

According to another aspect of the present invention, there is provided a method comprising: obtaining one or more cryptographic hash values of a target file to be downloaded; causing transmission of the one or more cryptographic hash values to a trusted source; obtaining reputation data relating to the target file originated from the trusted source in response to the transmission of the one or more cryptographic hash values; and controlling download of the target file on the basis of the reputation data.

According to another aspect of the present invention, there is provided a computer readable medium comprising a set of instructions, which, when executed on an apparatus cause the apparatus to perform: obtaining one or more cryptographic hash values of a target file to be downloaded; causing transmission of the one or more cryptographic hash values to a trusted source; obtaining reputation data relating to the target file originated from the trusted source in response to the transmission of the one or more cryptographic hash values; and controlling download of the target file on the basis of the reputation data.

According to another aspect of the present invention, there is provided an apparatus comprising: means for obtaining one or more cryptographic hash values of a target file to be downloaded; means for causing transmission of the one or more cryptographic hash values to a trusted source; means for obtaining reputation data relating to the target file originated from the trusted source in response to the transmission of the one or more cryptographic hash values; and means for controlling download of the target file on the basis of the reputation data.

LIST OF DRAWINGS

Example embodiments of the present invention are described below, by way of example only, with reference to the accompanying drawings, in which

2

FIGS. 1, 2, 3 and 4 are simplified block diagrams illustrating various example embodiments of an apparatus;

FIGS. 5 and 6 are signal sequence charts illustrating example embodiments of communication;

FIGS. 7, 8, 9 and 10 are flow charts illustrating example embodiments of a method;

FIG. 11 illustrates an example embodiment of a torrent file; and

FIG. 12 illustrates an example embodiment of a magnet link.

DESCRIPTION OF EMBODIMENTS

The following embodiments are only examples. Although the specification may refer to “an” embodiment in several locations, this does not necessarily mean that each such reference is to the same embodiment(s), or that the feature only applies to a single embodiment. Single features of different embodiments may also be combined to provide other embodiments. Furthermore, words “comprising” and “including” should be understood as not limiting the described embodiments to consist of only those features that have been mentioned and such embodiments may contain also features/structures that have not been specifically mentioned.

It should be noted that while Figures illustrate various embodiments of apparatuses, they are simplified block diagrams that only show some structures and functional entities. The connections shown in these Figures are logical connections; the actual physical connections may be different. Interfaces between the various elements may be implemented with suitable interface technologies, such as a message interface, a method interface, a sub-routine call interface, a block interface, or any hardware/software means enabling communication between functional sub-units. It is apparent to a person skilled in the art that the described apparatuses may also comprise other functions and structures. It should be appreciated that details of some functions, structures, and the protocols used for communication are irrelevant to the actual invention. Therefore, they need not be discussed in more detail here. Although the apparatuses have been depicted as separate single entities, different parts may be implemented in one or more physical or logical entities.

FIG. 1 illustrates an example embodiment of the general operation environment including a client apparatus 100 communicating 154, 156, 158, 160 over a network 120 with a trusted source 132 and a server 140, 144.

The client apparatus 100 may be any electronic apparatus capable of downloading data over the network 120. A non-exhaustive list of the types of the client apparatus 100 includes: an electronic digital computer, a desktop computer, a portable computer, a laptop computer, a tablet computer, a smartphone, a mobile phone, or any other electronic apparatus requiring download control. The client apparatus 100 may employ an operating system such as Android, Microsoft Windows, Microsoft Windows Phone, Apple iOS, Apple Mac OS X, Linux, or Symbian, for example.

The network 120 may include various wired/wireless standard/non-standard/proprietary communication networks such as a computer network, a private network, an IP-based network (TCP/IP=Transmission Control Protocol/Internet Protocol), the Internet, the telephone network including the public switched telephone network, any mobile phone network, regardless of the generation (such as 2G, 3G, 4G, beyond 4G, etc.) such as GSM (Global System for Mobile Communications), GPRS (General Packet Radio Service), EGPRS (Enhanced GPRS), WCDMA (Wideband Code Divi-

sion Multiple Access), UMTS (Universal Mobile Telephone System), 3GPP (The 3rd Generation Partnership Project), IMT (International Mobile Telecommunication), LTE (Long Term Evolution, LTE-A (LTE-Advanced), and other radio systems (in their present forms and/or in their evolution forms), such as WLAN (Wireless Local Area Network) based on IEEE (Institute of Electrical and Electronics Engineers) 802.11 standard or its evolution versions (IEEE 802.11ac etc.), WiMAX (Worldwide Interoperability for Microwave Access, or Wi-Fi, for example.

The trusted source **132** refers to a reliable party keeping track of reputation of target files **142**. The trusted source **132** may operate in an antivirus cloud **130**, which refers to antivirus software operating in a cloud computing environment for prevention, detection, and removal of malware, whereby shared resources, software, and information are provided to the antivirus (software) **106** of the client **100** as a utility over the network **120**. Naturally, the antivirus cloud **130** may be implemented according to the more traditional client-server computing model as well. Furthermore, the trusted source **132** may also be implemented as a stand-alone reputation server without any antivirus cloud **130**.

The server **140, 144** is a part of the client-server computing model that acts as distributed application which partitions tasks or workloads between the provider of a resource or service, called server **140, 144**, and the service requester, called client **100**. The server computer **140, 144** is a host that is running one or more server programs which share their resources with clients **100**. The client **100** may request a server's content or service function, in our case a target file **142**. The client **100** therefore initiates a communication session with the server **140, 144** which awaits incoming requests. The server **140, 144** may also operate according to the cloud computing model. Additionally, or alternatively, the server may also operate according to the peer-to-peer (P2P) computing model. A pure peer-to-peer system consists of equal peer nodes that simultaneously function as both clients **100** and servers **140, 144**. In a hybrid peer-to-peer system, a need for a special role is recognized: one or several nodes, but not all nodes, have a special role, which serves the other nodes of the peer-to-peer system. In FIG. 1, the server **140, 144** may have the special role serving the client **100**. Additionally, the client **100** may also serve as a server to another client thereby sharing the downloaded target file **142**.

The client apparatus **100** comprises one or more processors **102**, and one or more memories **102** including computer program code **106, 108**. The processor **102** and the memory **102** may be implemented by electronic circuitry.

The term 'processor' refers to a physical device that is capable of processing data in a computer or other digital electronic device. Depending on the processing power needed, the client apparatus **100** may comprise several processors **102** such as parallel processors or one or more multicore processors. A non-exhaustive list of implementation techniques for the processor **102** includes, but is not limited to: logic components, standard integrated circuits, application-specific integrated circuits (ASIC), system-on-a-chip (SoC), application-specific standard products (ASSP), microprocessors, digital signal processors, special-purpose computer chips, and field-programmable gate arrays (FPGA).

The term 'memory' refers to a physical device that is capable of storing the computer program code **106, 108** and data on a temporary or permanent basis for use in a computer or other digital electronic device. In an example embodiment, the term 'memory' refers to working memory (also known as primary storage, main memory or internal storage) directly accessible to the processor. In an example embodiment, the

working memory may be implemented as a random-access memory (RAM), such as a dynamic RAM, DRAM.

In an example embodiment illustrated in FIG. 4, the client apparatus **100** may be an electronic digital computer, which may comprise a non-volatile memory **402**, a working memory **404**, a processor **406**, a system clock **414** and an input/output **416** including a communication interface **418** and a user interface **420**. Naturally, the computer may comprise a number of other peripheral devices, not illustrated here for the sake of clarity.

In an example embodiment, the system clock **414** constantly generates a stream of electrical pulses, which cause the various transferring operations within the computer to take place in an orderly manner and with specific timing.

In an example embodiment, the processor **406** may be implemented as a microprocessor implementing functions of a central processing unit (CPU) on an integrated circuit. The CPU **406** is a logic machine executing a computer program **106**, which comprises program instructions **114**. The computer program **106** may be coded as a computer program using a programming language, which may be a high-level programming language, such as C, C++, or Java, or a low-level programming language, such as a machine language, or an assembler. There are many ways to structure the program **106**. In an example embodiment, the operations of the program may be divided into functional modules, sub-routines, methods, classes, objects, applets, macros, etc., depending on the software design methodology and the programming language used. In modern programming environments, there are software libraries, i.e. compilations of ready-made functions, which may be utilized by the program for performing a wide variety of standard operations.

The CPU **406** may comprise a set of registers **408**, an arithmetic logic unit (ALU) **410**, and a control unit (CU) **412**. The control unit **412** is controlled by a sequence of instructions **114** transferred to the CPU **406** from the working memory **404**. The working memory **404** is directly or indirectly connected to the CPU **406** via a memory bus **430** including two buses: an address bus and a data bus. The CPU **406** sends a memory address indicating the desired location of data (=data such as the hash value(s) **104** or instructions **114**) number through the address bus, whereupon the CPU **406** reads or writes the data itself from/to the working memory **404** using the data bus.

The control unit **412** may contain a number of microinstructions for basic operations. The implementation of the microinstructions may vary, depending on the CPU design. The microprocessor **406** may also have an operating system (such as general-purpose operating system, a dedicated operating system of an embedded system, or a real-time operating system), which may provide the computer program **106** with system services. During running of the program **106**, the instructions **114** are transferred via the memory bus **430** from the working memory **404** into the control unit **412**, wherein usually a portion of the instructions **114** resides and controls the operation.

In an example embodiment, the non-volatile memory **402** retains the stored information even when not powered. Examples of non-volatile memory include read-only memory (ROM), flash memory, magnetic computer storage devices such as hard disk drives, and optical discs. As is shown in FIG. 4, the non-volatile memory **402** may store both data **440** and the computer program **106** comprising the instructions **114**.

An example embodiment, illustrated in FIG. 1, provides a computer readable medium **112** comprising a set of instructions **114**, which, when executed on the client apparatus **100** cause the client apparatus **100** to perform the required opera-

tions. In an example embodiment, the instructions **114** may be in source code form, object code form, or in some intermediate form. The computer-readable medium **112** may comprise at least the following: any entity or device capable of carrying **150** the instructions **114** to the client apparatus **100**, a record medium, a computer memory, a read-only memory, an electrical carrier signal, a telecommunications signal, and a software distribution medium. In some jurisdictions, depending on the legislation and the patent practice, the medium **112** may not be the telecommunications signal. In an example embodiment, the medium **112** may be a non-transitory computer readable storage medium.

The one or more memories **102** and the computer program code **106**, **108** are configured to, with the one or more processors **102**, cause the client apparatus **100** at least to perform:

- 1) obtain one or more cryptographic hash values **104** of the target file **142** to be downloaded;
- 2) cause transmission **154** of the one or more cryptographic hash values **104** to the trusted source **132**;
- 3) obtain **156** reputation data **110** relating to the target file **142** originated from the trusted source **132** in response to the transmission **154** of the one or more cryptographic hash values **104**; and
- 4) control download **158** of the target file **142** on the basis of the reputation data **110**.

In an example embodiment, the cryptographic hash value **104** has been calculated by a cryptographic hash function, which is a deterministic function, whose input is an arbitrary block of data (=contents of the target file **142**), and whose output is the hash value **104** (also known as a message digest, digest, digital fingerprint, or checksum). The cryptographic hash value **104** may be a (even globally) unique identifier for the target file **142**, similar to the ISBN (International Standard Book Number).

In an example embodiment, the target file **142** to be downloaded refers to any content received locally by the client **100** from the remote server **140**. Such content includes, but is not limited to: film, video, music, broadcast, personal material, software etc.

In an example embodiment, the remote server **140** is a web server. In an example embodiment, the remote server **140** utilizes BitTorrent, which is a peer-to-peer file sharing protocol. Rather than downloading a file from a single source server **140**, the BitTorrent protocol (bittorrent.org) allows the client **100** to join a “swarm” of hosts **140**, **144** enabling simultaneous downloading **158**, **160** of the target file **142** that has been divided into small information chunks found on an unlimited number of different hosts **140**, **144**. In an example embodiment of FIG. **1**, there is 1 to N servers **140**, **144**, N being an integer greater than one.

In an example embodiment, the one or more memories **102** and the computer program code **106**, **108** are further configured to, with the one or more processors **102**, cause the client apparatus **100** further to perform: obtain the one or more cryptographic hash values **104** of the target file **142** to be downloaded by at least one of the following:

- read the one or more cryptographic hash values **104** from a torrent file,
- read the one or more cryptographic hash values **104** from a magnet link,
- obtain the one or more cryptographic hash values from a web browser **108**,
- obtain the one or more cryptographic hash values from a peer-to-peer client **108**.

As illustrated in FIG. **1**, the antivirus **106** and the client software **108** may be separate software entities communicating **152** with each other. The client software **108** may be a web

browser, a peer-to-peer client, or any other software application capable of downloading **158**, **160** the target file **142**. In an example embodiment, the antivirus **106** includes a plug-in that is loaded into the client software **108** for facilitating the communication **152**. However, alternatively, the antivirus **106** and the client **108** functionalities may be combined within a single software entity as well. Consequently, the antivirus **106** functionality may be a part of the client software **108**.

FIG. **11** illustrates an example embodiment of a de-ben-coded torrent file **1100** storing metadata used for BitTorrent. The torrent file **1100** contains the URL (Uniform/Universal Resource Locator) of a tracker, integrity metadata about all the pieces, and possibly additional metadata defined in extensions to the BitTorrent specification. The torrent file **1100** of FIG. **11** includes the following keys:

- announce—the URL of the tracker;
- info—this maps to a dictionary whose keys are dependent on whether one or more files are being shared:
 - name—suggested file/directory name where the file(s) is/are to be saved;
 - piece length—number of bytes per piece. This is commonly 256 KiB, but in our example embodiment pieces are 51 KiB;
 - pieces—a hash list. That is, a concatenation of each piece’s SHA-1 (=a cryptographic hash function designed by the United States National Security Agency) hash **104**. As SHA-1 returns a 160-bit hash, pieces is a string whose length is a multiple of 160-bits.

As illustrated in FIG. **2**, the antivirus **106** of the client **100** may in collaboration **152** with the client software **106** obtain the hash value(s) **104** from a hash list **204** within a torrent file **202** stored in a filesystem **200** maintaining the physical location of the torrent file **202**. In other words, the client **100** may read the hash value(s) from the memory **102**, i.e. from a data storage device, such as a hard disk drive, flash memory, solid state-drive (SSD) etc.

FIG. **5** illustrates an example embodiment with a signal sequence chart of processing the torrent file **202**, **1100**. The client software **108** makes **500** a torrent file request for a torrent server **520**. The torrent server **520** is the torrent file hosting site, whereas the server **140**, **144** hosts the target file **142**. The torrent server **520** returns **502** the torrent file for the client software **108**. The client software **108** stores **504** the torrent file with the filesystem **200**. The antivirus **106** obtains **506** the torrent file from the filesystem **200**. The antivirus **106** parses **510** the hash(es) from the torrent file. The antivirus **106** communicates **512** the hash(es) from the torrent file to the trusted source **132**. The trusted source **132** checks **514** the reputation for the hash(es). The trusted source **132** returns **516** the reputation for the antivirus **106**.

FIG. **12** illustrates an example embodiment of a magnet link **1200**. The magnet URI (Uniform Resource Identifier) scheme is a draft open standard defining a URI scheme for magnet links, which are mainly used to reference resources available for download via peer-to-peer networks. Such a link typically identifies a file not by location, but by the content’s cryptographic hash value **104**. The most common parameter is “xt”, meaning “exact topic”, which is generally a URN formed from the content hash of the target file **142**. In FIG. **12**, the string “YNCKHTQCWBTRNJIV4WNAE52SJUQCZO5C” is a Base32 encoded SHA-1 hash **104** of the target file **142**.

As illustrated in FIG. **3**, the client software **108** such as a web browser or a P2P client may obtain the hash value(s) **104** from the magnet URI **300** and communicate **152** the hash

7

values(s) **104** to the antivirus **106**. Such communication **152** may require, as was explained earlier, an antivirus plug-in component that is loaded into the client software **108** for catching and communicating all magnet URIs.

FIG. 6 illustrates an example embodiment with a signal sequence chart of processing the magnet link **300**, **1200**. The antivirus **106** receives **600** the magnet URI from the client software **108**. The antivirus **106** parses **602** the hash(es) from the magnet URI. The antivirus **106** communicates **604** the hash(es) from the magnet URI to the trusted source **132**. The trusted source **132** checks **606** the reputation for the hash(es). The trusted source **132** returns **608** the reputation for the antivirus **106**.

In an example embodiment, the reputation data **110** indicates at least one of the following: a computer security status of the target file **142**, a malware status of the target file **142**, a result of an antivirus software **130** analysis of the target file **142**.

In an example embodiment, the reputation data **110** has been generated in the trusted source **132** by checking the one or more cryptographic hash values **154** against a database **134** including reputation data of a plurality of hash values.

In an example embodiment, the one or more memories **102** and the computer program code **106**, **108** are further configured to, with the one or more processors **102**, cause the client apparatus **100** further to perform: transform the reputation data **110** into a download decision data of the target file **142** to be downloaded; and control the download **158**, **160** of the target file **142** on the basis of the reputation data **110** according to the download decision data.

So far it has been described that the reputation data **110** of the target file **142** to be downloaded may be checked. This may save time for the user using the client **100** and valuable bandwidth required for the download **158**, **160**.

There are two ways to perform the described operation.

In the first example embodiment, the one or more memories **102** and the computer program code **106**, **108** are further configured to, with the one or more processors **102**, cause the client apparatus **100** to perform the obtaining of the one or more cryptographic hash values **104**, the transmission **154** of the one or more cryptographic hash values **104**, and the obtaining **156** of the reputation data **110** before starting the download **158**, **160** of the target file **142** to be downloaded, whereupon the download **158**, **160** of the target file **142** is controlled on the basis of the reputation data **110**.

This first example embodiment allows the antivirus **106** to prevent malicious (=target file **142** is contaminated with malware) download **158**, **160** from starting, thus preventing the infection of the client **100**. As there is no need to download the target file **142** first to perform the malware check, time, storage space and bandwidth are saved. There is also no need to waste computing resources of the client **100** for scanning the target file **142**.

In the second example embodiment, the one or more memories **102** and the computer program code **106**, **108** are further configured to, with the one or more processors **102**, cause the client apparatus **100** further to perform at least one of the following:

control the download **158**, **160** of the target file **142** on the basis of the reputation data **110** such that if the reputation data indicates that the target file **142** to be downloaded is clean, download **158**, **160** is allowed, or if the reputation data **110** indicates that the target file **142** to be downloaded is malicious, download **158**, **160** is not allowed; if the download **158**, **160** of the target file **142** has been initiated before the obtaining **156** of the reputation data **110**, control the download **158**, **160** of the target file **142**

8

on the basis of the reputation data **110** such that the download **158**, **160** is interrupted if the reputation data **110** indicates that the target file **142** is not safe or the download **158**, **160** is continued if the reputation data **110** indicates that the target file **142** is safe; or if the download **158**, **160** of the target file **142** has been completed before the obtaining **156** of the reputation data **110**, control the download **158**, **160** of the target file **142** on the basis of the reputation data **110** such that the downloaded target file **142** is discarded if the reputation data **110** indicates that the target file **142** is not safe or the downloaded target file **142** is forwarded for further processing if the reputation data **110** indicates that the target file **142** is safe.

This second example embodiment allows the antivirus **106** not to allow download **158**, **160** if the target file **142** is malicious, interrupt malicious (=target file **142** is infested with malware) download **158**, **160**, or discard the malicious (=target file **142** is infested with malware) download **158**, **160**, thus preventing the infection of the client **100**. Time of the user may be saved as there is no need to first wait for the reputation data **156**, but the download **158**, **160** may be started immediately.

Next, example embodiments of a method will be described with reference to FIGS. 7, 8, 9 and 10. Other functions, not described in this application, may also be executed between the operations or within the operations. Some of the operations or parts of the operations may also be left out or replaced by a corresponding operation or part of the operation.

The method starts in **700**.

In **702**, one or more cryptographic hash values of a target file to be downloaded are obtained.

In **704**, transmission of the one or more cryptographic hash values to a trusted source is caused.

In **706**, reputation data relating to the target file originated from the trusted source in response to the transmission of the one or more cryptographic hash values is obtained. In an example embodiment **716**, the reputation data indicates at least one of the following: a computer security status of the target file, a malware status of the target file, a result of an antivirus software analysis of the target file. In an example embodiment **714**, the reputation data has been generated in the trusted source by checking the one or more cryptographic hash values against a database including reputation data of a plurality of hash values.

In **708**, download of the target file is controlled on the basis of the reputation data.

The method ends in **710**.

The embodiments of the earlier described client apparatuses **100** may also be used to enhance the method. In an example embodiment, the method may be implemented in the client apparatus **100** described earlier. In an embodiment, a computer program comprises instructions **114**, which, when loaded into the apparatus **100**, cause the apparatus **100** to perform the described process and its further example embodiments. In an embodiment, a computer readable storage medium comprises the computer program.

Next, further example embodiments of the method will be described. These example embodiments may be freely combined with each other in order to produce further example embodiments.

In an example embodiment, the obtaining **702** of the one or more cryptographic hash values of the target file to be downloaded comprises at least one of the following **712**:

reading the one or more cryptographic hash values from a torrent file;

reading the one or more cryptographic hash values from a magnet link;
 obtaining the one or more cryptographic hash values from a web browser;
 obtaining the one or more cryptographic hash values from a peer-to-peer client.

In an example embodiment, user interaction **720** relating to the reputation data is performed. The contents of the reputation data, for example, may be communicated to the user, and the user may make the final decision regarding the download.

In an example embodiment, the method further comprises: transforming **718** the reputation data into a download decision data of the target file to be downloaded; and controlling **708**, **722** the download of the target file on the basis of the reputation data according to the download decision data.

In an example embodiment **724**, the obtaining **702** of the one or more cryptographic hash values, the transmission **704** of the one or more cryptographic hash values, and the obtaining **706** of the reputation data are performed before starting the download of the target file to be downloaded, whereupon the download of the target file is controlled **708** on the basis of the reputation data.

In an example embodiment, illustrated in FIG. **8**, the method further comprises: controlling **708** the download of the target file on the basis of the reputation data **800** such that if the reputation data indicates that the target file to be downloaded is clean **802**, download is allowed **804**, or if the reputation data indicates that the target file to be downloaded is malicious **806**, download is not allowed **808**. The reputation data **800** may also be unknown **810**, i.e. it is not known whether the target file is clean **802** or malicious **806**, in which case user interaction **812** may be used to make the selection: the user may select **814** to allow **804** the download, or select **816** not **808** to allow the download.

In an example embodiment, illustrated in FIG. **9**, the method further comprises: if the download of the target file has been initiated before the obtaining of the reputation data **900**, controlling **708** the download of the target file on the basis of the reputation data **902** such that the download is interrupted **910** if the reputation data indicates that the target file is not safe **908** or the download is continued **906** if the reputation data indicates that the target file is safe **904**. The reputation data **900** may also be unknown **912**, in which case user interaction **914** may be used to make the selection: the user may select **916** to continue **906** the download, or select **918** to interrupt **910** the download.

In an example embodiment, illustrated in FIG. **10**, the method further comprises: if the download of the target file has been completed before the obtaining of the reputation data **1000**, controlling **708** the download of the target file on the basis of the reputation data **1002** such that the downloaded target file is discarded **1010** if the reputation data indicates that the target file is not safe **1008** or the downloaded target file is forwarded for further processing **1006** if the reputation data indicates that the target file is safe **1004**. The reputation data **1002** may also be unknown **1012**, in which case user interaction **1014** may be used to make the selection: the user may select **1016** to process **1006** further the downloaded target file, or select **1018** to discard **1010** the downloaded target file.

It will be obvious to a person skilled in the art that, as technology advances, the inventive concept can be implemented in various ways. The invention and its embodiments are not limited to the example embodiments described above but may vary within the scope of the claims.

The invention claimed is:

1. An apparatus comprising one or more processors, and one or more memories including computer program code, the one or more memories and the computer program code configured to, with the one or more processors, cause the apparatus at least to perform:
 - obtain one or more cryptographic hash values of a target file to be downloaded;
 - cause transmission of the one or more cryptographic hash values to a trusted source;
 - obtain reputation data relating to the target file originated from the trusted source in response to the transmission of the one or more cryptographic hash values; and
 - control download of the target file on the basis of the reputation data,
 wherein the one or more memories and the computer program code are further configured to, with the one or more processors, cause the apparatus further to perform:
 - obtain the one or more cryptographic hash values of the target file to be downloaded by at least one of the following: read the one or more cryptographic hash values from a torrent file, read the one or more cryptographic hash values from a magnet link.
2. The apparatus of claim 1, wherein the reputation data indicates at least one of the following: a computer security status of the target file, a malware status of the target file, a result of an antivirus software analysis of the target file.
3. The apparatus of claim 1, wherein the reputation data has been generated in the trusted source by checking the one or more cryptographic hash values against a database including reputation data of a plurality of hash values.
4. The apparatus of claim 1, wherein the one or more memories and the computer program code are further configured to, with the one or more processors, cause the apparatus further to perform:
 - transform the reputation data into a download decision data of the target file to be downloaded; and
 - control the download of the target file on the basis of the reputation data according to the download decision data.
5. The apparatus of claim 1, wherein the one or more memories and the computer program code are further configured to, with the one or more processors, cause the apparatus to perform the obtaining of the one or more cryptographic hash values, the transmission of the one or more cryptographic hash values, and the obtaining of the reputation data before starting the download of the target file to be downloaded, whereupon the download of the target file is controlled on the basis of the reputation data.
6. The apparatus of claim 1, wherein the one or more memories and the computer program code are further configured to, with the one or more processors, cause the apparatus further to perform at least one of the following:
 - control the download of the target file on the basis of the reputation data such that if the reputation data indicates that the target file to be downloaded is clean, download is allowed, or if the reputation data indicates that the target file to be downloaded is malicious, download is not allowed;
 - if the download of the target file has been initiated before the obtaining of the reputation data, control the download of the target file on the basis of the reputation data such that the download is interrupted if the reputation data indicates that the target file is not safe or the download is continued if the reputation data indicates that the target file is safe; or

11

if the download of the target file has been completed before the obtaining of the reputation data, control the download of the target file on the basis of the reputation data such that the downloaded target file is discarded if the reputation data indicates that the target file is not safe or the downloaded target file is forwarded for further processing if the reputation data indicates that the target file is safe.

7. A method comprising:

obtaining one or more cryptographic hash values of a target file to be downloaded;

causing transmission of the one or more cryptographic hash values to a trusted source;

obtaining reputation data relating to the target file originated from the trusted source in response to the transmission of the one or more cryptographic hash values; and

controlling download of the target file on the basis of the reputation data,

wherein the obtaining the one or more cryptographic hash values of the target file to be downloaded comprises at least one of the following:

reading the one or more cryptographic hash values from a torrent file;

reading the one or more cryptographic hash values from a magnet link.

8. The method of claim 7, wherein the reputation data indicates at least one of the following: a computer security status of the target file, a malware status of the target file, a result of an antivirus software analysis of the target file.

9. The method of claim 7, wherein the reputation data has been generated in the trusted source by checking the one or more cryptographic hash values against a database including reputation data of a plurality of hash values.

10. The method of claim 7, further comprising:

transforming the reputation data into a download decision data of the target file to be downloaded; and

controlling the download of the target file on the basis of the reputation data according to the download decision data.

11. The method of claim 7, wherein the obtaining of the one or more cryptographic hash values, the transmission of the one or more cryptographic hash values, and the obtaining of the reputation data are performed before starting the download of the target file to be downloaded, whereupon the download of the target file is controlled on the basis of the reputation data.

12. The method of claim 7, further comprising at least one of the following:

controlling the download of the target file on the basis of the reputation data such that if the reputation data indicates that the target file to be downloaded is clean, download is allowed, or if the reputation data indicates that the target file to be downloaded is malicious, download is not allowed;

if the download of the target file has been initiated before the obtaining of the reputation data, controlling the download of the target file on the basis of the reputation data such that the download is interrupted if the reputation data indicates that the target file is not safe or the download is continued if the reputation data indicates that the target file is safe;

if the download of the target file has been completed before the obtaining of the reputation data, controlling the download of the target file on the basis of the reputation data such that the downloaded target file is discarded if the reputation data indicates that the target file is not safe

12

or the downloaded target file is forwarded for further processing if the reputation data indicates that the target file is safe.

13. A non-transitory computer readable medium comprising a set of instructions, which, when executed on an apparatus cause the apparatus to perform:

obtaining one or more cryptographic hash values of a target file to be downloaded;

causing transmission of the one or more cryptographic hash values to a trusted source;

obtaining reputation data relating to the target file originated from the trusted source in response to the transmission of the one or more cryptographic hash values; and

controlling download of the target file on the basis of the reputation data, the non-transitory computer readable medium, comprising a set of further instructions, which, when executed on the apparatus cause the apparatus to obtain the one or more cryptographic hash values of the target file to be downloaded by at least one of the following:

reading the one or more cryptographic hash values from a torrent file;

reading the one or more cryptographic hash values from a magnet link.

14. The non-transitory computer readable medium of claim 13, wherein the reputation data indicates at least one of the following: a computer security status of the target file, a malware status of the target file, a result of an antivirus software analysis of the target file.

15. The non-transitory computer readable medium of claim 13, wherein the reputation data has been generated in the trusted source by checking the one or more cryptographic hash values against a database including reputation data of a plurality of hash values.

16. The non-transitory computer readable medium of claim 13, comprising a set of further instructions, which, when executed on the apparatus cause the apparatus to further perform:

transforming the reputation data into a download decision data of the target file to be downloaded; and

controlling the download of the target file on the basis of the reputation data according to the download decision data.

17. The non-transitory computer readable medium of claim 13, wherein the obtaining of the one or more cryptographic hash values, the transmission of the one or more cryptographic hash values, and the obtaining of the reputation data are performed before starting the download of the target file to be downloaded, whereupon the download of the target file is controlled on the basis of the reputation data.

18. The non-transitory computer readable medium of claim 13, comprising a set of further instructions, which, when executed on the apparatus cause the apparatus to further perform at least one of the following:

controlling the download of the target file on the basis of the reputation data such that if the reputation data indicates that the target file to be downloaded is clean, download is allowed, or if the reputation data indicates that the target file to be downloaded is malicious, download is not allowed;

if the download of the target file has been initiated before the obtaining of the reputation data, controlling the download of the target file on the basis of the reputation data such that the download is interrupted if the reputa-

tion data indicates that the target file is not safe or the download is continued if the reputation data indicates that the target file is safe;

if the download of the target file has been completed before the obtaining of the reputation data, controlling the download of the target file on the basis of the reputation data such that the downloaded target file is discarded if the reputation data indicates that the target file is not safe or the downloaded target file is forwarded for further processing if the reputation data indicates that the target file is safe.

19. An apparatus comprising:

means for obtaining one or more cryptographic hash values of a target file to be downloaded;

means for causing transmission of the one or more cryptographic hash values to a trusted source;

means for obtaining reputation data relating to the target file originated from the trusted source in response to the transmission of the one or more cryptographic hash values; and

means for controlling download of the target file on the basis of the reputation data,

wherein the means for obtaining are configured to obtain the one or more cryptographic hash values of the target file to be downloaded by at least one of the following: read the one or more cryptographic hash values from a torrent file, read the one or more cryptographic hash values from a magnet link.

20. The apparatus of claim **1**, wherein the one or more cryptographic hash values of the target file to be downloaded are obtained from a file that is separate and distinct from the target file to be downloaded, and are not part of the target file.

* * * * *